

8107.300 Maxi H-Lite 3~

Grindex drainage pumps are designed for professional use in tough applications like mines, construction sites, tunnel sites and other demanding industries. They are designed for pumping water that may contain solids


– up to the size of the strainer holes. Grindex drainage pumps are designed for continuous, unattended operation. They have proven their reliability and dependable performance in demanding areas like building and construction, mining, tunnelling, quarries, industries and rental applications.



Technical specification



Curves according to: Water, pure [100%], 4 °C, 999.9 kg/m³, 1.5692 mm²/s

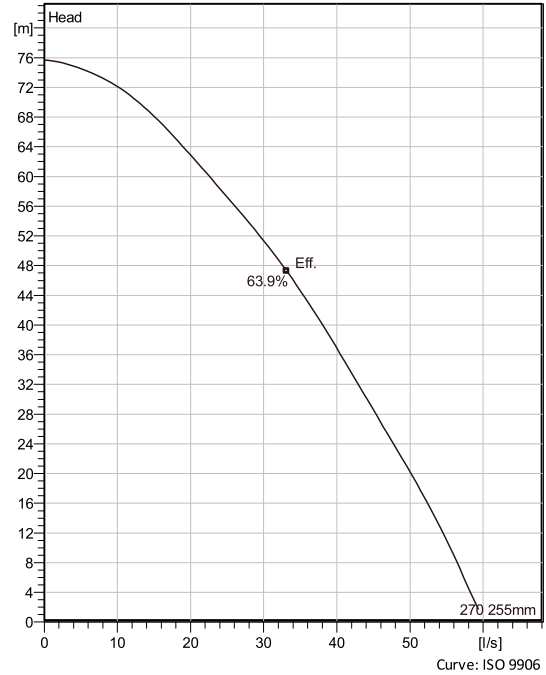

Configuration

Motor number B8107.300 25-18-2AA-W 25KW	Installation type S - Portable Semi permanent, Wet
Impeller diameter 255 mm	Discharge diameter 100 mm

Pump information

Impeller diameter 255 mm
Discharge diameter 100 mm
Inlet diameter
Maximum operating speed 2920 rpm
Number of blades 3

Materials

Impeller Stainless steel
Stator housing material Aluminium

Project
Block

Created by
Created on 4/27/2022

Last update 4/27/2022

Page 1 / 2

8107.300 Maxi H-Lite 3~

Technical specification



Motor - General

Motor number B8107.300 25-18-2AA-W 25KW	Phases 3~	Rated speed 2920 rpm	Rated power 25 kW
Approval No	Number of poles 2	Rated current 42 A	Stator variant 1
Frequency 50 Hz	Rated voltage 415 V	Insulation class H	Type of Duty S1

Motor - Technical

Power factor - 1/1 Load 0.92	Motor efficiency - 1/1 Load 89.7 %	Total moment of inertia 0.0852 kg m ²	Starts per hour max. 30
Power factor - 3/4 Load 0.90	Motor efficiency - 3/4 Load 91.3 %	Starting current, direct starting 286 A	
Power factor - 1/2 Load 0.84	Motor efficiency - 1/2 Load 92.1 %	Starting current, star-delta 95.3 A	

Project
Block

Created by
Created on 4/27/2022

Last update 4/27/2022
Page 2 / 2